

SS204 series low cost pressure transmitters

Features

- CE conformity
- O-ring sealing inside
- Low cost and high quality
- Compact, rugged construction
- -20 to 100 °C wider working temperature
- 0.5-4.5V, 0-5V, 1-5V, various voltage output
- Vented gauge, sealed gauge, absolute pressure
- A wide range of pressure and electrical connections



Stainless steel 316L diaphragm
Stainless steel sensor used inside

Descriptions

SS204 series low cost pressure sensor is the premium product of the SENDO OEM-line, it is a very classic sensor used in air, water, oil and other media compatible with stainless steel and FKM, smart size, beautiful appearance, light weight only about 60g, all these make the SS204 series suitable to the applications with limited space and weight.

SS204 series uses piezoresistive sensing technology with ASIC (Application Specific Integrated Circuit) signal conditioning in a brass housing and Metri-Pack 150 electrical connections, a high quality OD 19 mm pressure transducer floats on an O-ring seal and is therefore free of any housing stresses, giving excellent long-term stability.

The flexible pressure sensor programme covers absolute, sealed gauge and vented gauge versions, measuring ranges from 1 bar to 250 bar and a wide range of pressure connections. Typical applications: automotive: monitor the oil pressure, fuel pressure and brake system, HVAC/R: monitor system performance for proper environmental control, air compressors: monitor compressor performance.

Technical data

Performance (EN 60770)


Supply voltage	5 VDC	9 to 30 VDC (optional)	
Output signal	0.5 to 4.5 V	0 to 5 V (optional)	1 to 5 V (optional)
Measuring range	Minimum range: 1 bar Maximum range: 250 bar See more details in page 3 (part number chart)		
Proof pressure	2.0 × F.S. (≤ 250 bar)		
	1.5 × F.S. (> 250 bar)		
Accuracy	1% F.S. @ 25 °C		
	3% F.S. @ -20 → 100 °C		
Medium temp range	-20 → +100 °C		
Ambient temp range	-20 → +80 °C (depending on electrical connection)		
Insulation resistance	> 100 MΩ at 250 V		

SS204 series low cost pressure transmitters

Mechanical characteristics

Materials	Diaphragm	Stainless steel 316L	
	Housing	Brass (typical)	Stainless steel 316L (optional)
	Pressure connection	Brass (typical)	Stainless steel 316L (optional)
	Electrical connection	Depending on the connection type	
	O-ring	FKM / Viton (typical)	EPDM (optional)
Pressure connection	1/8" NPT or 1/4" NPT	More options see page 3 (part number chart)	
Electrical connection	3-pin round Packard		
Weight	100-200g (depending on pressure connection and electrical connection)		
Sealing rating	IP 65 (fulfilled together with mating connector)		

Dimensions (Unit: mm)

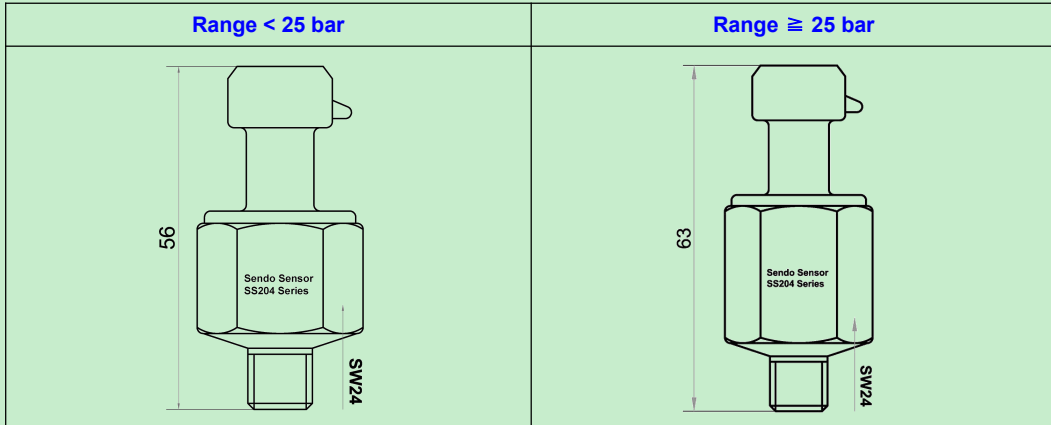

Electrical connections

Connections	Pin	Function	Color
	1	Supply +	Red
	2	GND	Black
	3	Output +	Blue

SS204 series low cost pressure transmitters

Part number chart (How to order)

PART NUMBER REQUIRED: **SS204.PL.01.A.03.A.06 (EXAMPLE)**

1	Pressure range	PL
	NA(-1...0bar) PA(15psi) PB(30psi) PC(50psi) PD(75psi) PE(100psi) PF(150psi) PG(1bar) PH(1.6bar) PI(2.5bar) PJ(4bar) PK(7bar) PL(10bar) PM(16bar) PN(25bar) PO(40bar) PP(60bar) PQ(100bar) PR(160bar) PS(200bar) PT(0...250) CA(-1...0.6bar) CB(-1...1.5bar) CC(-1...3bar) CD(-1...5bar) CE(-1...9bar) CF(-1...15bar) CG(-1...24bar) 1Z(Other pressure range or unit is on request)	
2	Pressure type	01
	01(Gauge) 02(Absolute)	
3	Electrical connection	A
	A(3-pin round Packard)	
4	Pressure connection	03
	01(1/4" NPT male) 02(1/2" NPT male) 03(1/8" NPT male) 04(G 1/4" male) 05(G 1/2" male) 06(G 1/8" male) 07(PT 1/4" male) 08(PT 1/2" male) 09(PT 1/8" male) 10(9/16-18 UNF male) 11(7/16-20 UNF male) 12(1/2-20 UNF male) 13(3/8-24 UNF male) 14(M10 x 1.25 male) 15(M14 x 1.5 male) 16(M20 x 1.5 male) 4Z(Other pressure connection is on request)	
5	Signal & supply	A
	A(0.5-4.5V & 5Vdc) B(0.5-4.5V & 9-30Vdc) C(0.2-4.5V & 5Vdc) D(0.2-4.5V & 9-30Vdc) E(1-5V & 9-30Vdc) F(0-5V & 9-30Vdc) G(0.5-4.5V & 5Vdc ratiometric) 5Z(Other output signal is on request)	
6	Mating cable(Pig tail)	06
	01(1m) 02(2m) 03(3m) 04(4m) 05(5m) 06(None) 6Z(Other length is on request)	

Contact us

Company	Ningbo Sendo Electronic Technology CO., LTD	
Email	sales@sendo-sensor.com	
Email	cain.chen@sendo-sensor.com	
Factory	No 15, Yongxing 2nd Rd, Chengbei Industrial Park, Huizhou District, 245900 China	
Office	Building. 1#1108, Wante business center, Hi-Tech, 315040 China	
Website	http://www.pressuresensorsuppliers.com	http://www.sendo-sensor.com
Skype: sendosensor	WeChat: chenjie4884	WhatsApp: +8613616574884
Tel: 0086-0574-27725960	Fax: 0086-0574-27725970	Phone: 0086-13616574884

*Specifications subject to change without notice, the latest date sheet please contact: sales@sendo-sensor.com



WARNING: DO NOT USE THIS PRODUCT AS SAFETY OR EMERGENCY STOP DEVICE OR IN ANY OTHER APPLICATION WHERE FAILURE OF THE PRODUCT COULD RESULT IN PERSONAL INJURY OR EVEN DEATH.